


Resistance = 55mΩ max

Frequency kHz	Ripple Current	10%ΔI	20%ΔI	30%ΔI
25	Total losses mW	50	50	50
	ΔT°C	7	7	7
50	Total losses mW	50	50	60
	ΔT°C	7	7	7
75	Total losses mW	50	50	60
	ΔT°C	7	7	8
100	Total losses mW	50	60	70
	ΔT°C	7	7	8

L f(Idc) Inductance Values


Idc (A)	Lmin (μH)
0	15,8
0,5	14,8
0,75	14,3
1	13,7
1,5	12,8

Electrical data @ 25°C

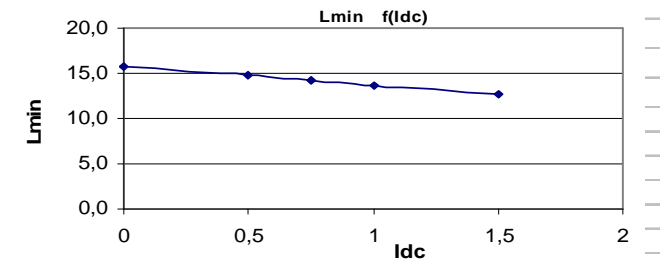


PN : 26106SNV

Mechanical dimensions

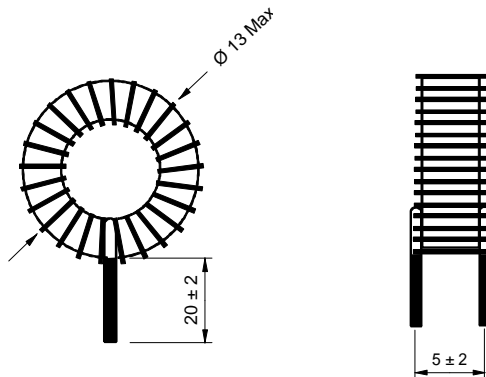


Schematic




Inductance 1-2
Implantation in holes : 0.7 mm

PN : 26106BV

Mechanical dimensions

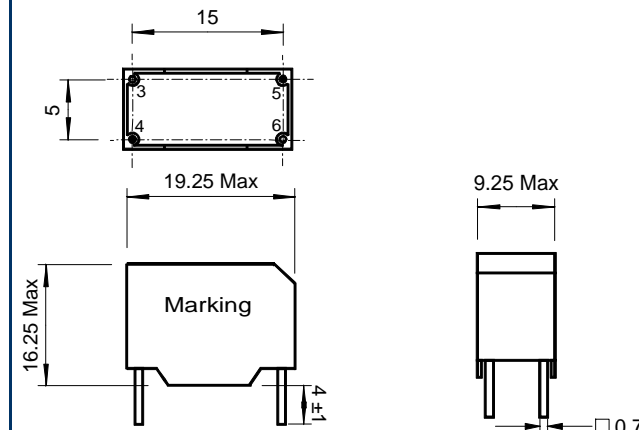

Schematic



Inductance 4-5
Blind pins 3-6
Implantation in holes : 1,3 mm