


Resistance = 30m Ω max

Frequency kHz	Ripple Current	10% Δ I	20% Δ I	30% Δ I
25	Total losses mW	150	160	160
	Δ T $^{\circ}$ C	14	14	15
50	Total losses mW	150	160	180
	Δ T $^{\circ}$ C	14	15	16
75	Total losses mW	160	170	200
	Δ T $^{\circ}$ C	14	16	18
100	Total losses mW	160	180	230
	Δ T $^{\circ}$ C	14	16	20

L f(Idc) Inductance Values


Idc (A)	Lmin (μ H)
0	20
1	17
2	15
2,5	14
3,5	12

Electrical data @ 25 $^{\circ}$ C

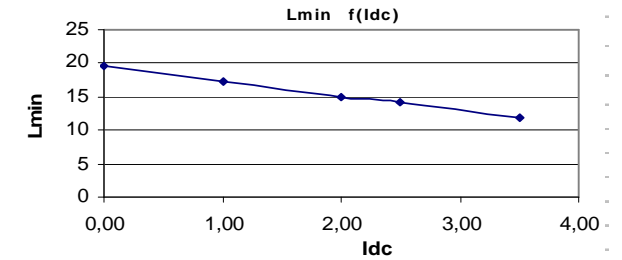


PN : 26110SNV

Mechanical dimensions

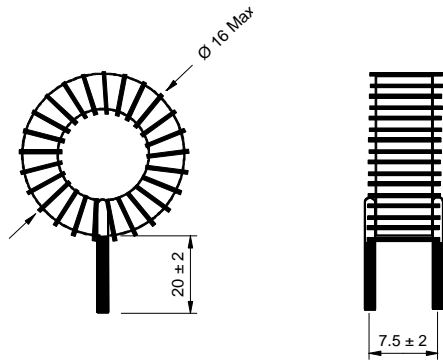


Schematic




Inductance 1-2
Implantation in holes : 0.9 mm

PN : 26110EE

Mechanical dimensions

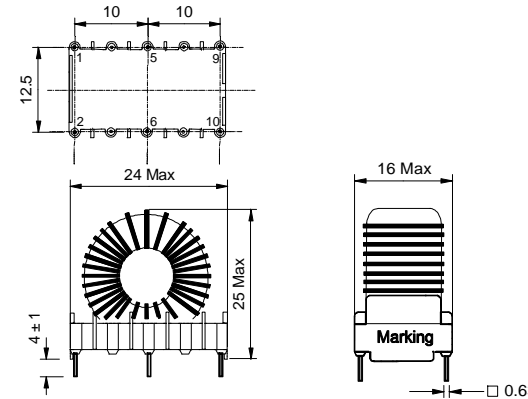


Schematic




Inductance 5-6
Blind pins 1-2-9-10
Implantation in holes : 1,2 mm

PN : 26110BV

Mechanical dimensions

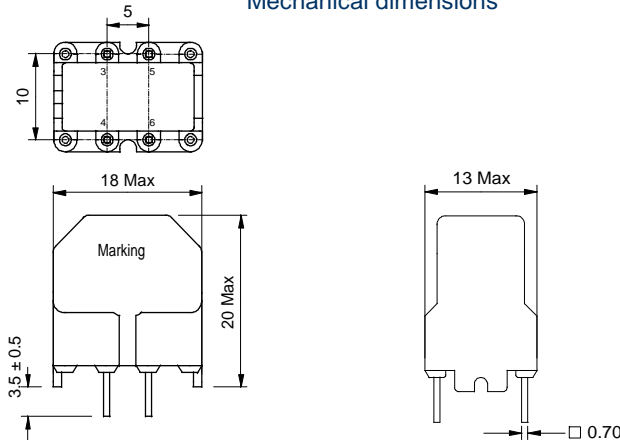


Schematic




Inductance 4-5
Blind pins 3-6
Implantation in holes : 1,3 mm

PN : 26110BH

Mechanical dimensions

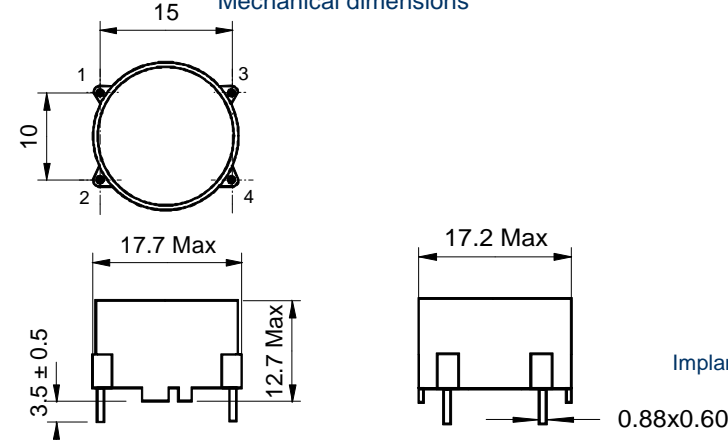

Schematic



Inductance 1-4
Blind pins 2-3
Implantation in holes : 1,3 mm