


Resistance = 45mΩ max

Frequency kHz	Ripple Current	10%ΔI	20%ΔI	30%ΔI
25	Total losses mW	90	90	100
	ΔT°C	9	9	10
	Total losses mW	90	100	100
50	ΔT°C	9	10	10
	Total losses mW	90	100	110
75	ΔT°C	10	10	11
	Total losses mW	90	110	120
100	ΔT°C	10	11	12

Electrical data @ 25°C


L f(I_{dc}) Inductance Values

I _{dc} (A)	L _{min} (μH)
0	24
0,5	23
1	22
1,6	22
2	21
2,2	20

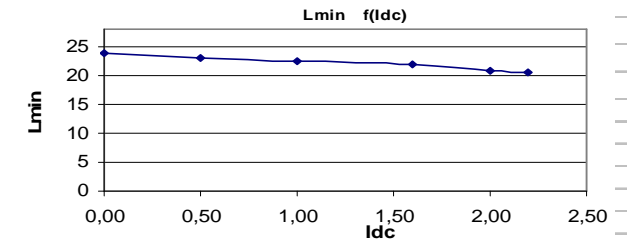


PN : 26108SNV

Mechanical dimensions

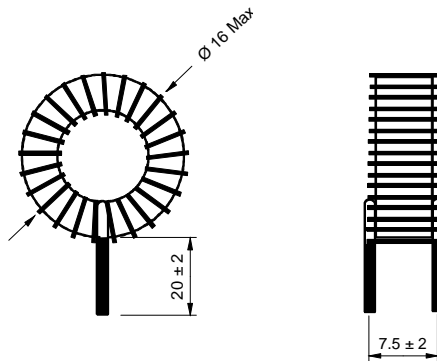


Schematic




Inductance 1-2
Implantation in holes : 0.8 mm

PN : 26108EE

Mechanical dimensions

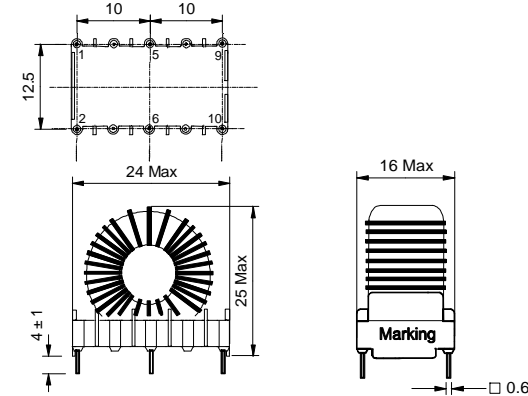


Schematic




Inductance 5-6
Blind pins 1-2-9-10
Implantation in holes : 1,2 mm

PN : 26108BV

Mechanical dimensions

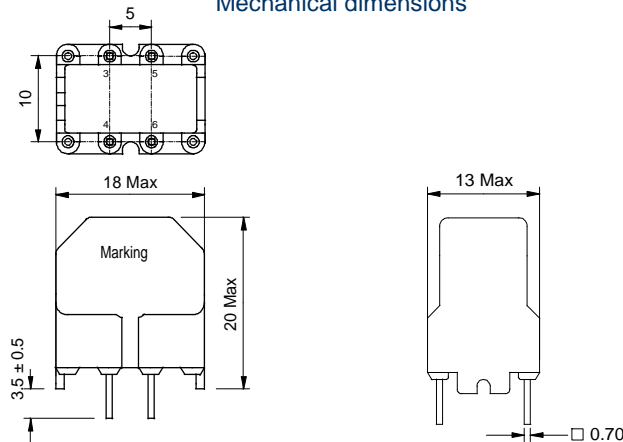


Schematic




Inductance 4-5
Blind pins 3-6
Implantation in holes : 1,3 mm

PN : 26108BH

Mechanical dimensions

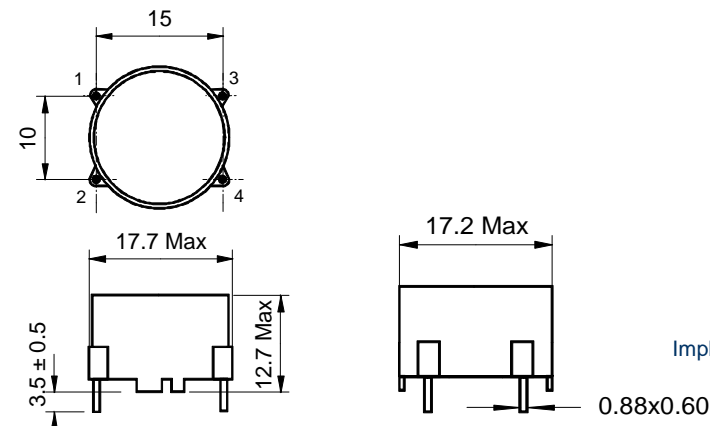

Schematic



Inductance 1-4
Blind pins 2-3
Implantation in holes : 1,3 mm