


Resistance = 15 m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	390	410	450
	$\Delta$ T $^{\circ}$ C	15	16	17
50	Total losses mW	400	460	560
	$\Delta$ T $^{\circ}$ C	16	18	21
75	Total losses mW	410	520	690
	$\Delta$ T $^{\circ}$ C	16	19	25
100	Total losses mW	430	580	840
	$\Delta$ T $^{\circ}$ C	17	21	29

**L f(Idc) Inductance Values**


Idc (A)	Lmin ( $\mu$ H)
0	23
1,5	21
3	18
4,5	16
6	14
7,5	13

Electrical data @ 25 $^{\circ}$ C

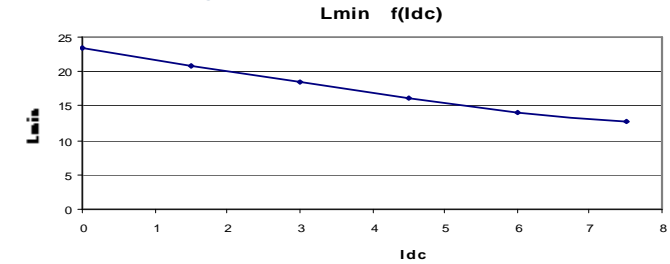


**PN : 26114SNV**

Mechanical dimensions

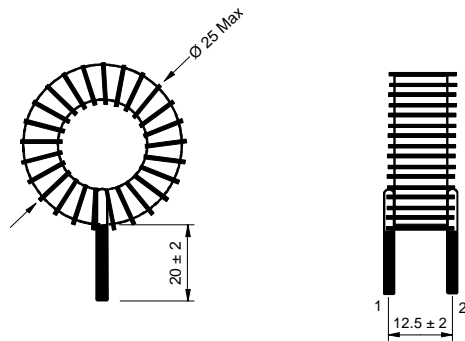


Schematic




Inductance 1-2  
Implantation in holes : 1.2 mm

**PN : 26114EE**

Mechanical dimensions

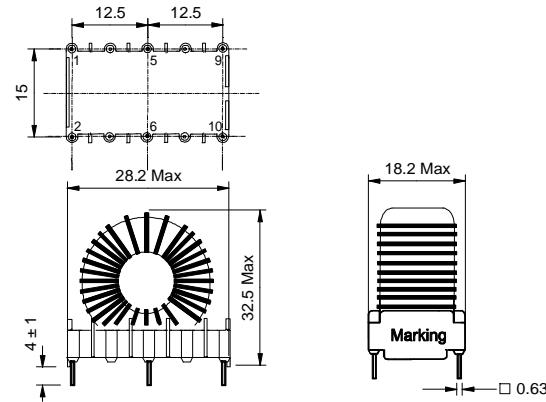

Schematic



Inductance 5-6  
Blind pins 1-2-9-10  
1-2-9-10 Implantation in holes : 1,2 mm  
5-6 Implantation in holes : 1,4 mm

[See Version BV](#)

[See Version BH](#)