


Resistance = 140mΩ max

Frequency kHz	Ripple Current	10%ΔI	20%ΔI	30%ΔI
25	Total losses mW	110	110	120
	ΔT°C	11	11	12
50	Total losses mW	110	120	130
	ΔT°C	11	12	13
75	Total losses mW	110	130	150
	ΔT°C	11	12	14
100	Total losses mW	120	130	160
	ΔT°C	11	13	15

L f(Idc) Inductance Values


Idc (A)	Lmin (μH)
0	73
0,5	64
0,75	59
1	55
1,5	48

Electrical data @ 25°C

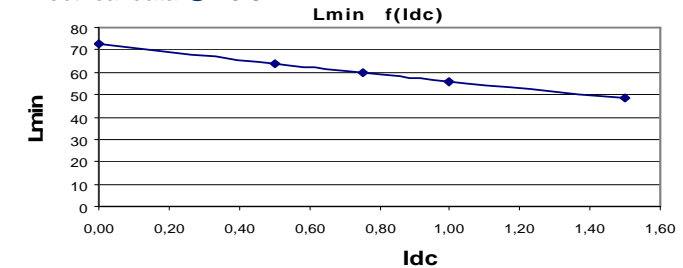


PN : 26256SNV

Mechanical dimensions

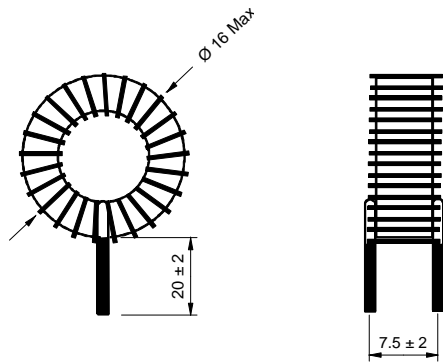


Schematic




Inductance 1-2
Implantation in holes : 0.7 mm

PN : 26256EE

Mechanical dimensions

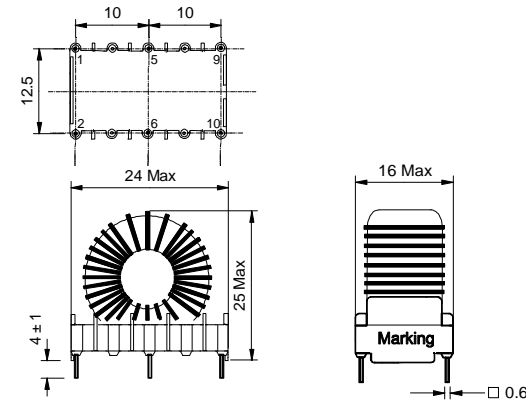


Schematic




Inductance 5-6
Blind pins 1-2-9-10
Implantation in holes : 1,2 mm

PN : 26256BV

Mechanical dimensions

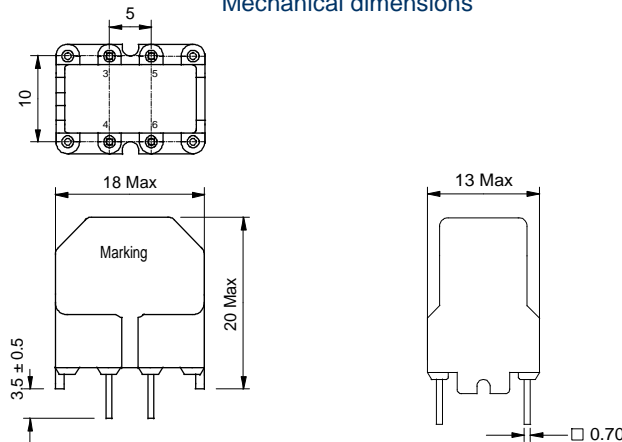


Schematic




Inductance 4-5
Blind pins 3-6
Implantation in holes : 1,3 mm

PN : 26256BH

Mechanical dimensions

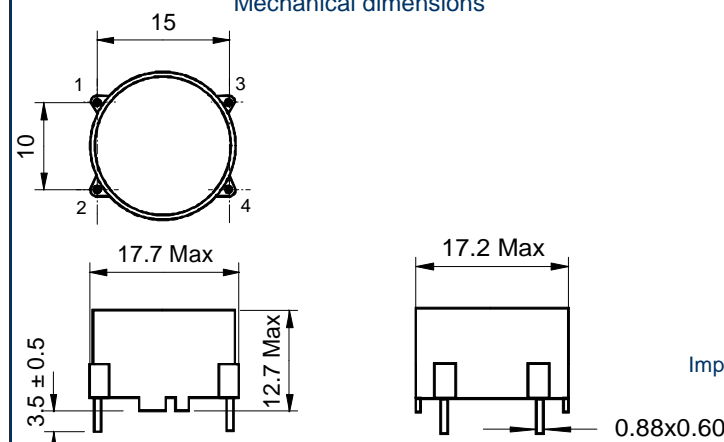

Schematic



Inductance 1-4
Blind pins 2-3
Implantation in holes : 1,3 mm