


Resistance = 280m Ω max

Frequency kHz	Ripple Current	10% Δ I	20% Δ I	30% Δ I
25	Total losses mW	20	20	20
	$\Delta T^{\circ}C$	3	3	3
50	Total losses mW	20	20	20
	$\Delta T^{\circ}C$	3	3	3
75	Total losses mW	20	20	20
	$\Delta T^{\circ}C$	3	3	4
100	Total losses mW	20	20	20
	$\Delta T^{\circ}C$	3	3	4

L f(I_{dc}) Inductance Values


I _{dc} (A)	L _{min} (μ H)
0	24
0,15	23
0,3	23
0,45	22
0,6	22

Electrical data @ 25 $^{\circ}C$

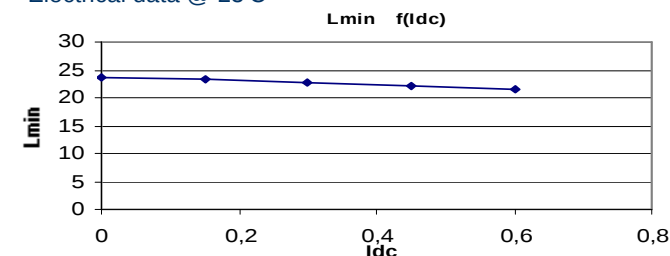


TPE P/N : 26152SNV

Mechanical dimensions

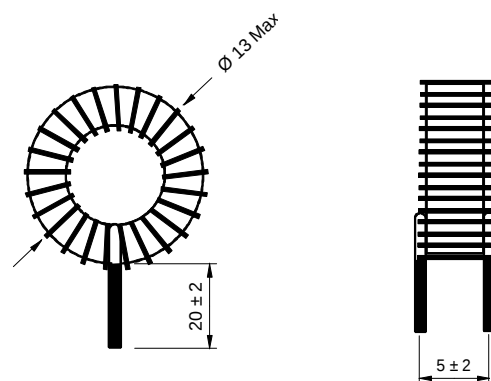


Schematic




Inductance 1-2
Implantation in holes : 0.5 mm

TPE P/N : 26152BV

Mechanical dimensions

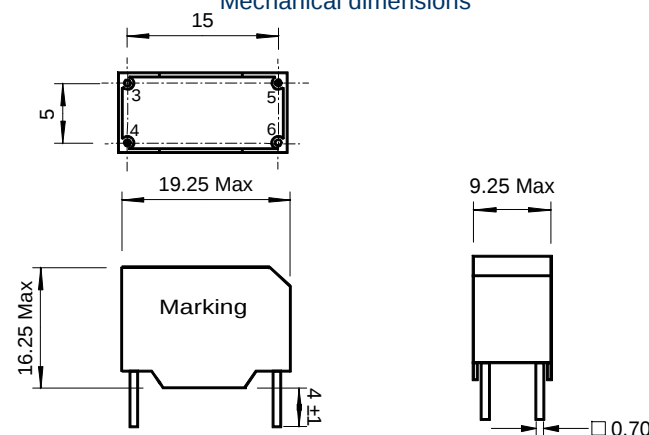

Schematic



Inductance 4-5
Blind pins 3-6
Implantation in holes : 1,3 mm