


Resistance = 50 m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	250	260	280
	$\Delta$ T $^{\circ}$ C	13	13	14
	Total losses mW	260	290	330
50	$\Delta$ T $^{\circ}$ C	13	14	16
	Total losses mW	270	310	390
75	$\Delta$ T $^{\circ}$ C	13	15	19
	Total losses mW	270	340	460
100	$\Delta$ T $^{\circ}$ C	14	17	21

**L f(Idc) Inductance Values**


Idc (A)	Lmin ( $\mu$ H)
0	49
1	43
2	38
2,5	35
3,5	31

Electrical data @ 25 $^{\circ}$ C

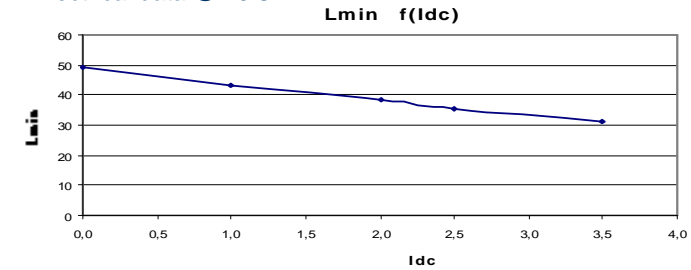


**PN : 26210SNV**

Mechanical dimensions

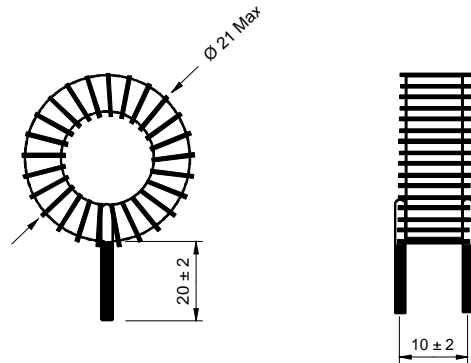


Schematic




Inductance 1-2  
Implantation in holes : 0.9 mm

**PN : 26210EE**

Mechanical dimensions

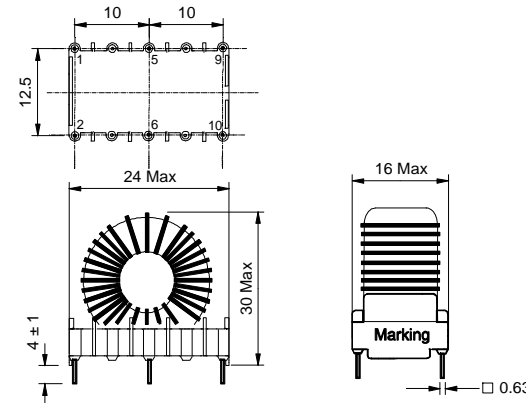


Schematic




Inductance 5-6  
Blind pins 1-2-9-10  
Implantation in holes : 1,2 mm

**PN : 26210BV**

Mechanical dimensions

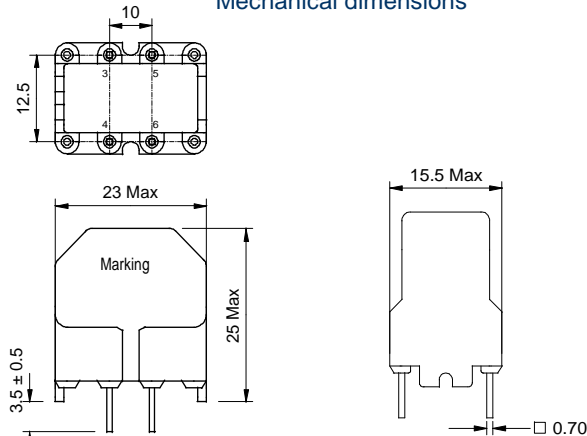


Schematic




Inductance 4-5  
Blind pins 3-6  
Implantation in holes : 1,3 mm

**PN : 26210BH**

Mechanical dimensions

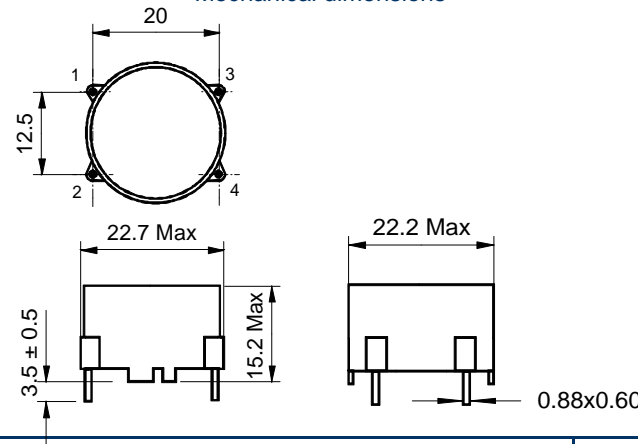

Schematic



Inductance 1-4  
Blind pins 2-3  
Implantation in holes : 1,3 mm