


Resistance = 70m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	920	970	1060
	$\Delta$ T $^{\circ}$ C	23	24	26
50	Total losses mW	940	1080	1310
	$\Delta$ T $^{\circ}$ C	23	26	31
75	Total losses mW	980	1210	1610
	$\Delta$ T $^{\circ}$ C	24	29	36
100	Total losses mW	1100	1360	
	$\Delta$ T $^{\circ}$ C	25	32	

**L f(I<sub>dc</sub>) Inductance Values**


I <sub>dc</sub> (A)	L <sub>min</sub> ( $\mu$ H)
0	160
1	138
2	118
3	101
4	87
5	75

Electrical data @ 25 $^{\circ}$ C

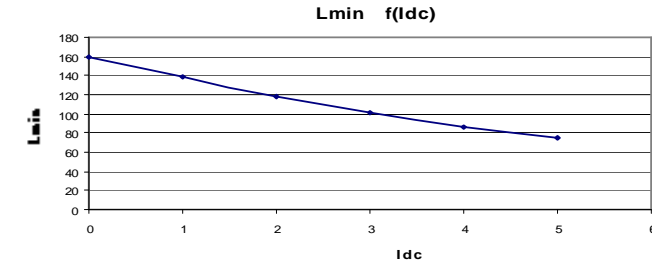


**PN : 26312SNV**

Mechanical dimensions

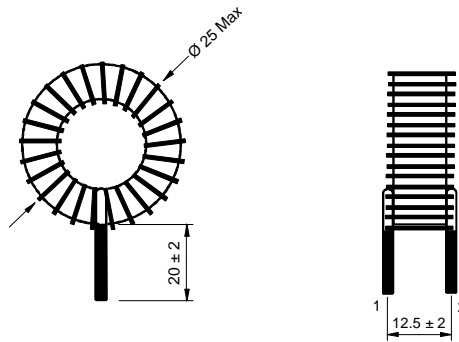


Schematic




Inductance 1-2  
Implantation in holes : 1.2 mm

**PN : 26312EE**

Mechanical dimensions

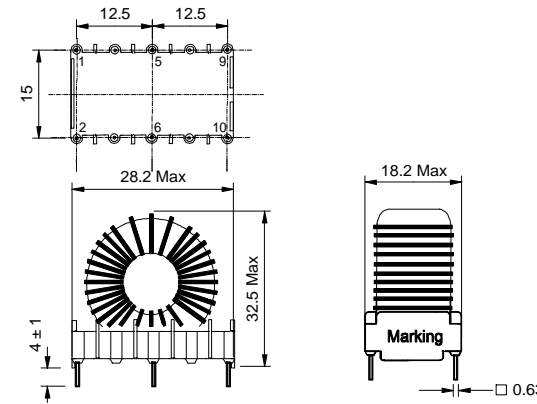

Schematic



Inductance 5-6  
Blind pins 1-2-9-10  
Implantation in holes : 1.2 mm

[See Version BV](#)

[See Version BH](#)