


Resistance = 100 m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	1300	1410	1610
	$\Delta$ T $^{\circ}$ C	21	22	25
50	Total losses mW	1360	1650	2150
	$\Delta$ T $^{\circ}$ C	21	25	32
75	Total losses mW	1430	1940	
	$\Delta$ T $^{\circ}$ C	22	29	
100	Total losses mW	1510	2270	
	$\Delta$ T $^{\circ}$ C	23	33	

**L f(I<sub>dc</sub>) Inductance Values**


I <sub>dc</sub> (A)	L <sub>min</sub> ( $\mu$ H)
0	420
1	359
2	304
3	257
4	218
5	187

Electrical data @ 25 $^{\circ}$ C

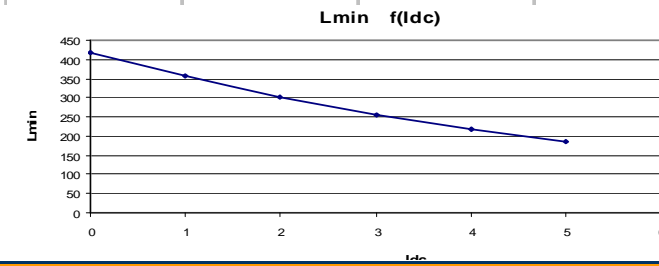


**PN : 26412SNV**

Mechanical dimensions

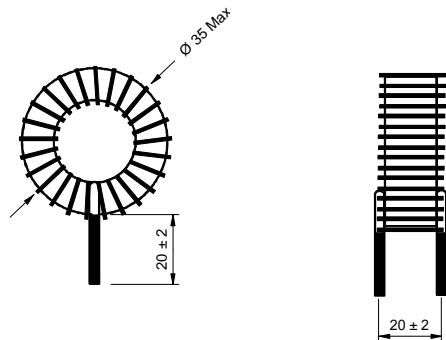


Schematic




Inductance 1-2  
Implantation in holes : 1.3 mm

**PN : 26412EE**

Mechanical dimensions

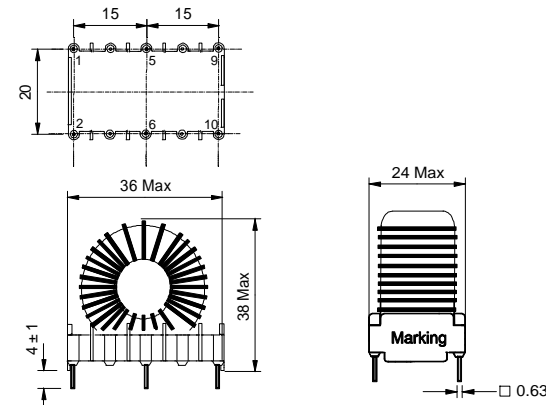

Schematic



Inductance 5-6  
Blind pins 1-2-9-10  
Implantation in holes : 1,2 mm

[See Version BV](#)

[See Version BH](#)