


Resistance = 230m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	1190	1270	1420
	$\Delta$ T $^{\circ}$ C	19	20	22
50	Total losses mW	1230	1450	1820
	$\Delta$ T $^{\circ}$ C	20	23	27
75	Total losses mW	1280	1660	2310
	$\Delta$ T $^{\circ}$ C	21	26	33
100	Total losses mW	1340	1900	
	$\Delta$ T $^{\circ}$ C	21	29	

Electrical data @ 25 $^{\circ}$ C


**L f(Idc) Inductance Values**

Idc (A)	Lmin ( $\mu$ H)
0	566
1	471
2	387
2,5	352
3,5	291

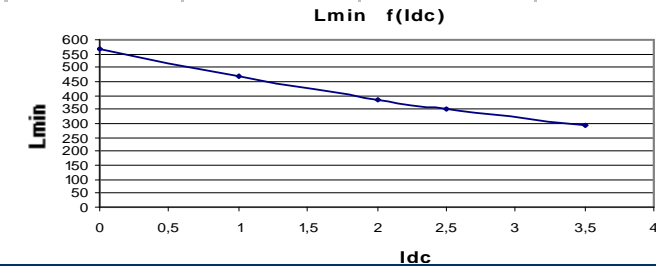


**PN : 26460SNV**

Mechanical dimensions

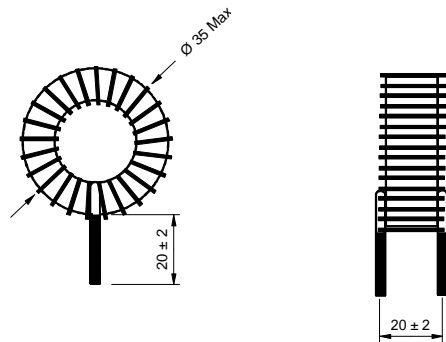


Schematic




Inductance 1-2  
Implantation in holes : 0,9 mm

**PN : 26460EE**

Mechanical dimensions

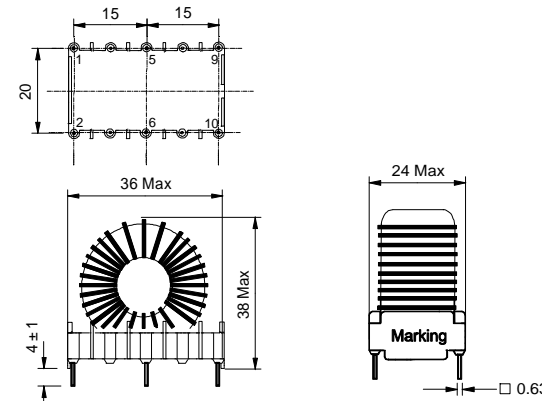


Schematic




Inductance 5-6  
Blind pins 1-2-9-10  
Implantation in holes : 1,2 mm

**PN : 26460BV**

Mechanical dimensions

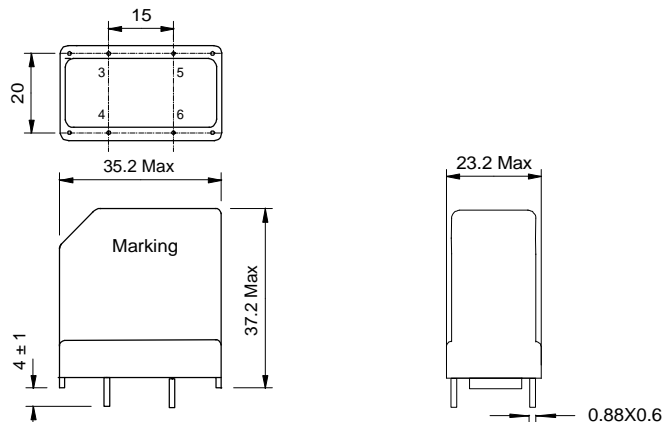


Schematic




Inductance 4-5  
Blind pins 3-6  
Implantation in holes : 1,3 mm

**PN : 26460BH**

Mechanical dimensions

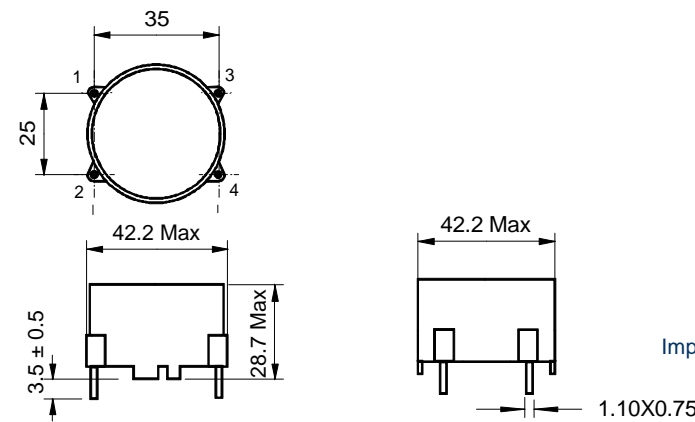

Schematic



Inductance 1-4  
Blind pins 2-3  
Implantation in holes : 1,5 mm