





DESCRIPTION : 100VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10100B1024	230V	24V	25,1V	4,167A	Ta 40/B	100VA	EN61558-2-6
S10100B1048	230V	48V	50,2 V	2,083A			EN61558-2-6
S10100B1115	230V	115V	120,6V	0,870A			EN61558-2-4
S10100B1230	230V	230V	240,9V	0,435A			EN61558-2-4
S10100B1400	230V	400V	418V	0,250A			EN61558-2-6
S10100B2024	230V	2x24V	2x25,1V	2,083A			EN61558-2-6
S10100B2048	230V	2x48V	2x50,2 V	1,042A			EN61558-2-4
S10100B2115	230V	2x115V	2x120,6V	0,435A			EN61558-2-4
S10100A1024	400V	24V	25,1V	4,167A			EN61558-2-6
S10100A1048	400V	48V	50,2 V	2,083A			EN61558-2-6
S10100A1115	400V	115V	120,6V	0,870A			EN61558-2-4
S10100A1230	400V	230V	240,9V	0,435A			EN61558-2-4
S10100A1400	400V	400V	418V	0,250A			EN61558-2-4
S10100A2024	400V	2x24V	2x25,1V	2,083A			EN61558-2-6
S10100A2048	400V	2x48V	2x50,2 V	1,042A			EN61558-2-4
S10100A2115	400V	2x115V	2x120,6V	0,435A			EN61558-2-4

Electrical schematics



Mechanical schematics

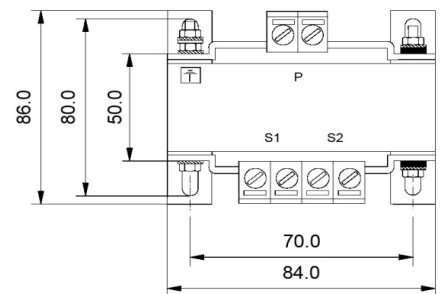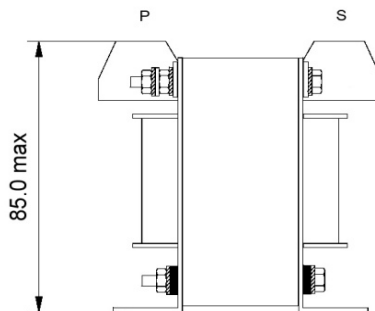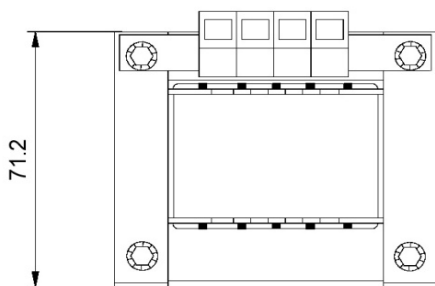

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 2,1 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards





DESCRIPTION : 100VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10100E1024	24V	25,1V	4,167A	Ta 40/B	100VA	EN61558-2-6
S10100E1048	48V	50,2 V	2,083A			EN61558-2-6
S10100E1115	115V	120,6V	0,870A			EN61558-2-4
S10100E1230	230V	240,9V	0,435A			EN61558-2-4
S10100E1400	400V	418V	0,250A			EN61558-2-6
S10100E2024	2x24V	2x25,1V	2,083A			EN61558-2-6
S10100E2048	2x48V	2x50,2 V	1,042A			EN61558-2-4
S10100E2115	2x115V	2x120,6V	0,435A			EN61558-2-4

Electrical schematics



Mechanical schematics

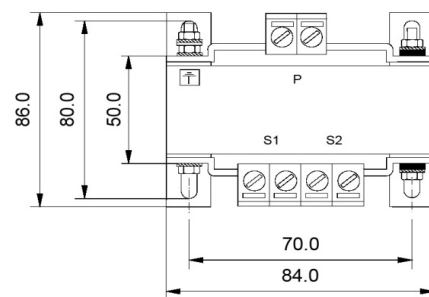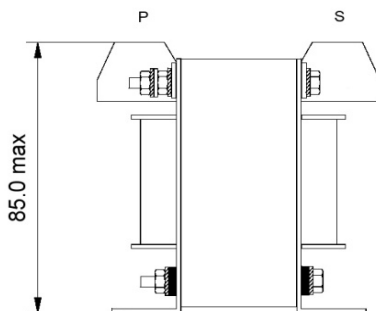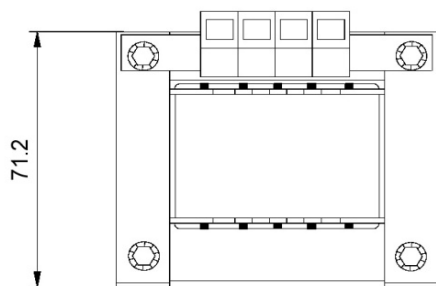

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 2,1 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards