


Resistance = 170m $\Omega$  max

Frequency kHz	Ripple Current	10% $\Delta$ I	20% $\Delta$ I	30% $\Delta$ I
25	Total losses mW	900	1110	1580
	$\Delta$ T $^{\circ}$ C	23	27	36
50	Total losses mW	970	1490	
	$\Delta$ T $^{\circ}$ C	24	35	
75	Total losses mW	1040		
	$\Delta$ T $^{\circ}$ C	26		
100	Total losses mW	1120		
	$\Delta$ T $^{\circ}$ C	27		

Electrical data @ 25 $^{\circ}$ C


**L f(Idc) Inductance Values**

Idc (A)	Lmin ( $\mu$ H)
0	532
1	460
2	386
2,5	352
3,5	281

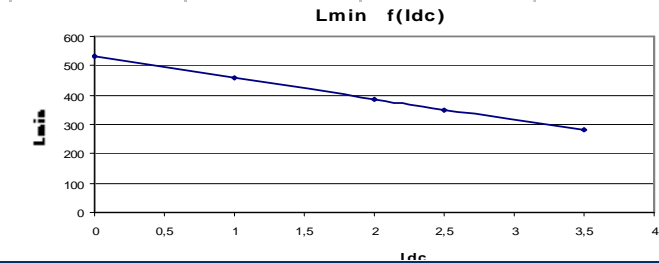


**PN : 77460SNV**

Mechanical dimensions

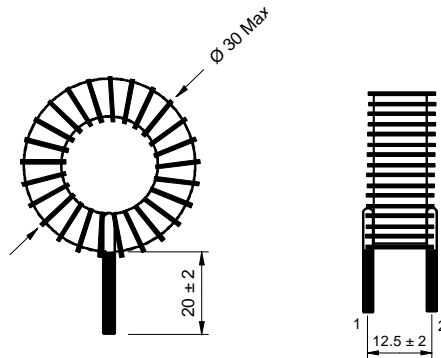


Schematic




Inductance 1-2  
Implantation in holes : 0,9 mm

**PN : 77460EE**

Mechanical dimensions

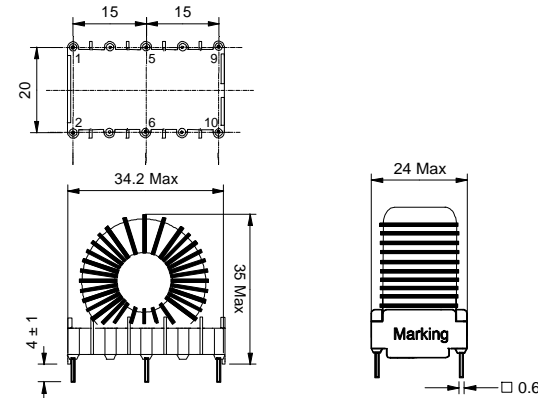


Schematic




Inductance 5-6  
Blind pins 1-2-9-10  
Implantation in holes : 1,2 mm

**PN : 77460BV**

Mechanical dimensions

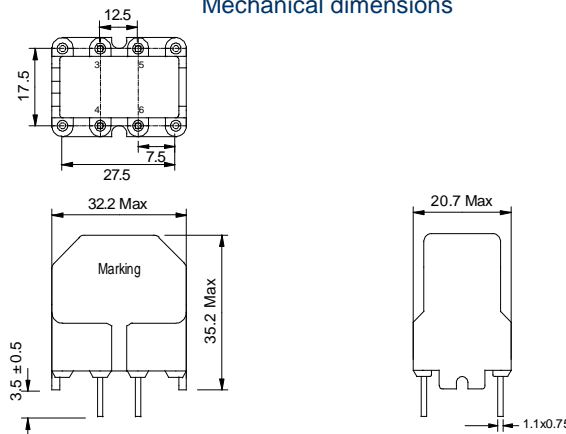


Schematic




Inductance 4-5  
Blind pins 3-6  
Implantation in holes : 1,5 mm

**PN : 77460BH**

Mechanical dimensions

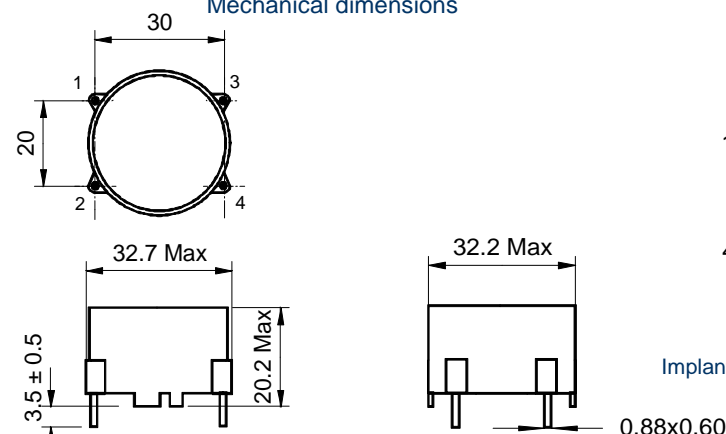

Schematic



Inductance 1-4  
Blind pins 2-3  
Implantation in holes : 1,3 mm