





DESCRIPTION : 160VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10160B1024	230V	24V	25,5V	6,667A	Ta 40/B	160VA	EN61558-2-6
S10160B1048	230V	48V	50,2V	3,333A			EN61558-2-6
S10160B1115	230V	115V	120,8V	1,391A			EN61558-2-4
S10160B1230	230V	230V	241,7V	0,696A			EN61558-2-4
S10160B1400	230V	400V	420,7V	0,400A			EN61558-2-6
S10160B2024	230V	2x24V	2x25,1V	3,333A			EN61558-2-6
S10160B2048	230V	2x48V	2x50,2V	1,667A			EN61558-2-4
S10160B2115	230V	2x115V	2x124,6V	0,696A			EN61558-2-4
S10160A1024	400V	24V	25,3V	6,667A			EN61558-2-6
S10160A1048	400V	48V	50,2V	3,333A			EN61558-2-6
S10160A1115	400V	115V	120,4V	1,391A			EN61558-2-4
S10160A1230	400V	230V	241,7V	0,696A			EN61558-2-4
S10160A1400	400V	400V	419,0V	0,400A			EN61558-2-4
S10160A2024	400V	2x24V	2x24,9V	3,333A			EN61558-2-6
S10160A2048	400V	2x48V	2x50,2V	1,667A			EN61558-2-4
S10160A2115	400V	2x115V	2x120,0V	0,696A			EN61558-2-4

Electrical schematics



Mechanical schematics

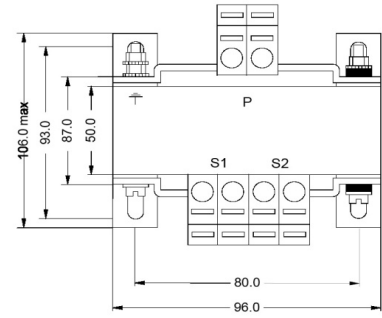

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 3 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

DATA SHEET

S10160 Series





DESCRIPTION : 160VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions



ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10160E1024	24V	25,1V	6,667A	Ta 40/B	750VA	EN61558-2-6
S10160E1048	48V	50,6V	3,333A			EN61558-2-6
S10160E1115	115V	120,9V	1,391A			EN61558-2-4
S10160E1230	230V	241,7V	0,696A			EN61558-2-4
S10160E1400	400V	421V	0,400A			EN61558-2-4
S10160E2024	2x24V	2x25,1V	3,333A			EN61558-2-6
S10160E2048	2x48V	2x50,6V	1,667A			EN61558-2-6
S10160E2115	2x115V	2x121,2V	0,696A			EN61558-2-6

Electrical schematics



Mechanical schematics

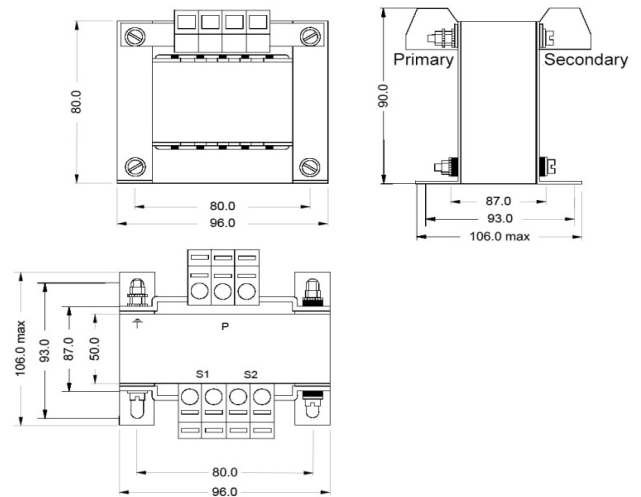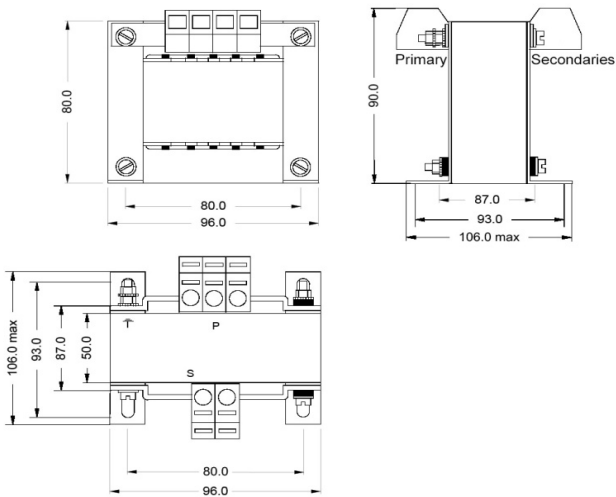

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 3 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards