





DESCRIPTION : 4000VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S14000B1115	230V	115V	117,7V	34,78A	Ta40/B	4000VA	EN61558-2-4
S14000B1230	230V	230V	234,0V	17,39A			EN61558-2-4
S14000B1400	230V	400V	405,0V	10,00A			EN61558-2-6
S14000B2048	230V	2x48V	2x49,0V	41,66A			EN61558-2-4
S14000B2115	230V	2x115V	2x117,7V	17,39A			EN61558-2-4
S14000A1115	400V	115V	117,7V	26,09A			EN61558-2-4
S14000A1230	400V	230V	234,0V	13,03A			EN61558-2-4
S14000A1400	400V	400V	405,0V	7,500A			EN61558-2-4
S14000A2048	400V	2x48V	2x49,0V	31,25A			EN61558-2-4
S14000A2115	400V	2x115V	2x117,7V	13,03A			EN61558-2-4

Electrical schematics



Mechanical schematics

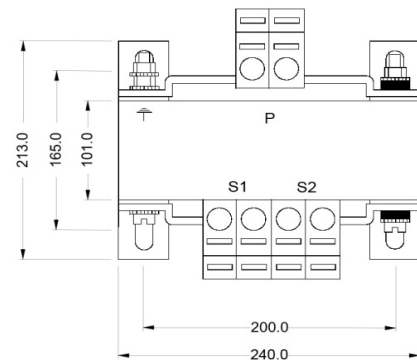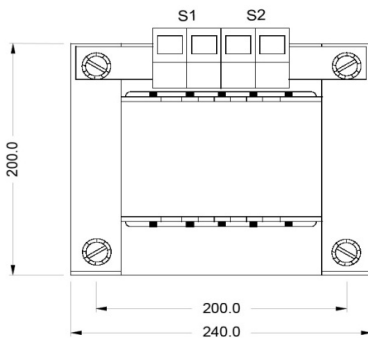

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 38 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

DATA SHEET

S14000 Series





DESCRIPTION : 4000VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions



ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S14000E1115	115V	117,7V	34,78A	Ta40/B	4000VA	EN61558-2-4
S14000E1230	230V	234,0V	17,39A			EN61558-2-4
S14000E1400	400V	405,0V	10,00A			EN61558-2-4
S14000E2048	2x48V	2x49,0V	41,66A			EN61558-2-4
S14000E2115	2x115V	2x117,7V	17,39A			EN61558-2-4

Electrical schematics



Mechanical schematics

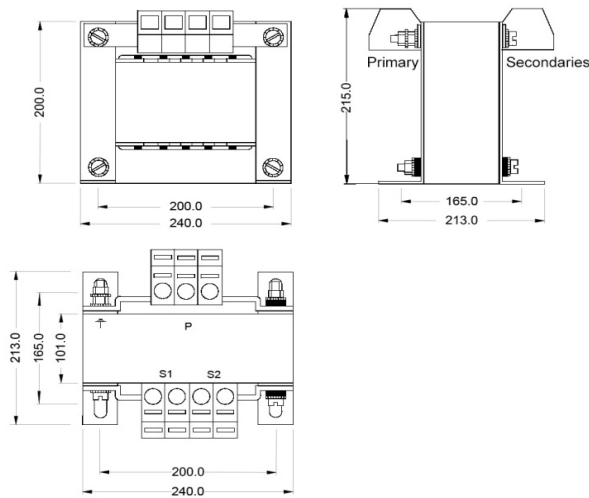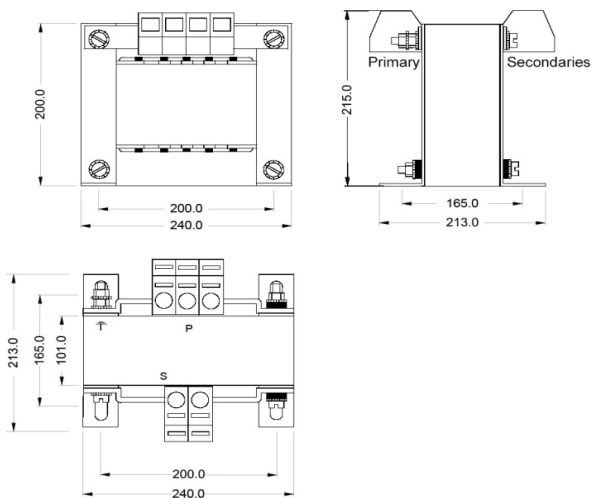

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 38 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards