





DESCRIPTION : 400VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10400B1024	230V	24V	24,6V	16,67A	Ta40/B	400VA	EN61558-2-6
S10400B1048	230V	48V	49,2V	8,333A			EN61558-2-6
S10400B1115	230V	115V	117,9V	3,478A			EN61558-2-4
S10400B1230	230V	230V	235,8V	1,739A			EN61558-2-4
S10400B1400	230V	400V	410,0V	1,000A			EN61558-2-6
S10400B2024	230V	2x24V	2x24,6V	8,333A			EN61558-2-6
S10400B2048	230V	2x48V	2x49,2V	1,667A			EN61558-2-4
S10400B2115	230V	2x115V	2x117,9V	1,739A			EN61558-2-4
S10400A1024	400V	24V	24,6V	16,67A			EN61558-2-6
S10400A1048	400V	48V	49,2V	8,333A			EN61558-2-6
S10400A1115	400V	115V	117,9V	3,478A			EN61558-2-4
S10400A1230	400V	230V	235,8V	1,739A			EN61558-2-4
S10400A1400	400V	400V	410,0V	1,000A			EN61558-2-4
S10400A2024	400V	2x24V	2x24,6V	5,208A			EN61558-2-6
S10400A2048	400V	2x48V	2x49,2V	1,667A			EN61558-2-4
S10400A2115	400V	2x115V	2x117,9V	1,739A			EN61558-2-4

Electrical schematics



Mechanical schematics

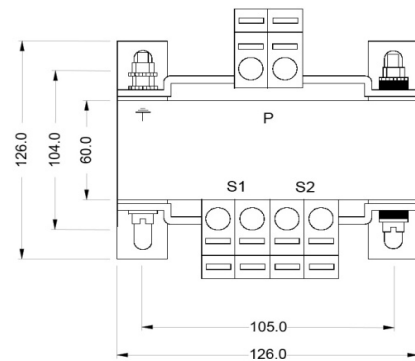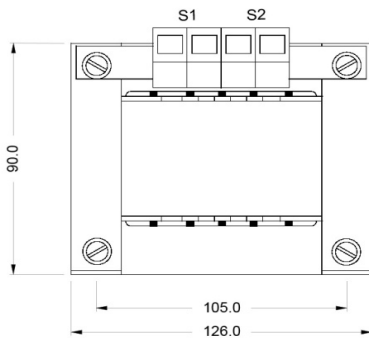

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 5,6 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

DATA SHEET

S10400 Series





DESCRIPTION : 400VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions





ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10400E1024	24V	24,6V	16,67A	Ta40/B	400VA	EN61558-2-6
S10400E1048	48V	49,2V	8,333A			EN61558-2-6
S10400E1115	115V	117,9V	3,478A			EN61558-2-4
S10400E1230	230V	235,8V	1,739A			EN61558-2-4
S10400E1400	400V	410,0V	1,000A			EN61558-2-4
S10400E2024	2x24V	2x24,6V	8,333A			EN61558-2-6
S10400E2048	2x48V	2x49,2V	1,667A			EN61558-2-6
S10400E2115	2x115V	2x117,9V	1,739A			EN61558-2-6

Electrical schematics



Mechanical schematics

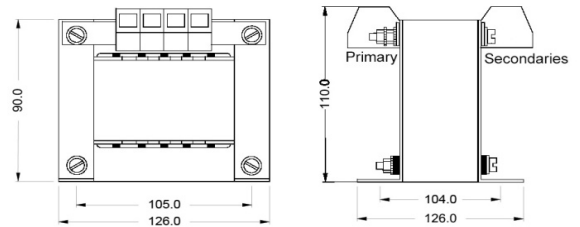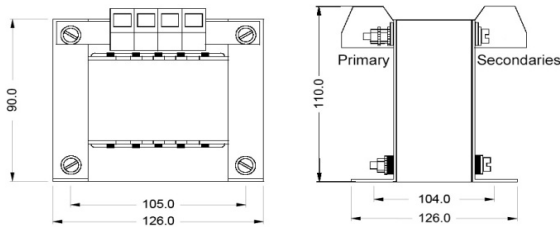

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 5,6 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

