





### DESCRIPTION : 40VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




#### ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10040B1024	230V	24V	25,7V	1,667A	Ta40/B	40VA	EN61558-2-6
S10040B1048	230V	48V	51,4V	0,833A			EN61558-2-6
S10040B1115	230V	115V	123,2V	0,348A			EN61558-2-4
S10040B1230	230V	230V	246,5V	0,174A			EN61558-2-4
S10040B1400	230V	400V	429,3V	0,100A			EN61558-2-6
S10040B2024	230V	2x24V	2x25,7V	0,833A			EN61558-2-6
S10040B2048	230V	2x48V	2x51,4V	1,667A			EN61558-2-4
S10040B2115	230V	2x115V	2x123,2V	0,174A			EN61558-2-4
S10040A1024	400V	24V	25,7V	1,667A			EN61558-2-6
S10040A1048	400V	48V	51,4V	0,833A			EN61558-2-6
S10040A1115	400V	115V	123,2V	0,348A			EN61558-2-4
S10040A1230	400V	230V	246,5V	0,174A			EN61558-2-4
S10040A1400	400V	400V	429,3V	0,100A			EN61558-2-4
S10040A2024	400V	2x24V	2x25,7V	0,833A			EN61558-2-6
S10040A2048	400V	2x48V	2x51,4V	1,667A			EN61558-2-4
S10040A2115	400V	2x115V	2x123,2V	0,174A			EN61558-2-4

#### Electrical schematics



#### Mechanical schematics

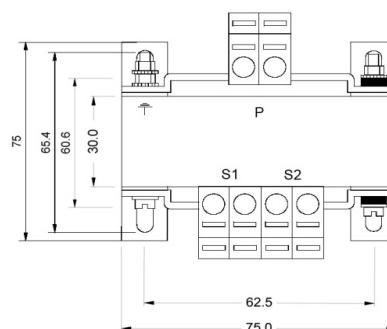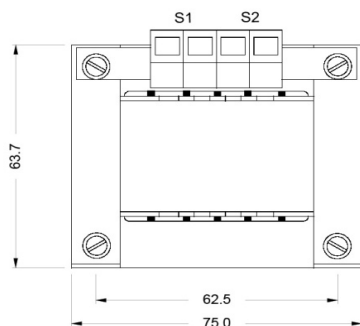

#### GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 1,2 kg

#### PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards





### DESCRIPTION : 40VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions


#### ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10040E1024	24V	25,7V	1,667A	Ta40/B	40VA	EN61558-2-6
S10040E1048	48V	51,4V	0,833A			EN61558-2-6
S10040E1115	115V	123,2V	0,348A			EN61558-2-4
S10040E1230	230V	246,5V	0,174A			EN61558-2-4
S10040E1400	400V	429,3V	0,100A			EN61558-2-4
S10040E2024	2x24V	2x25,7V	0,833A			EN61558-2-6
S10040E2048	2x48V	2x51,4V	1,667A			EN61558-2-6
S10040E2115	2x115V	2x123,2V	0,174A			EN61558-2-6

#### Electrical schematics



#### Mechanical schematics

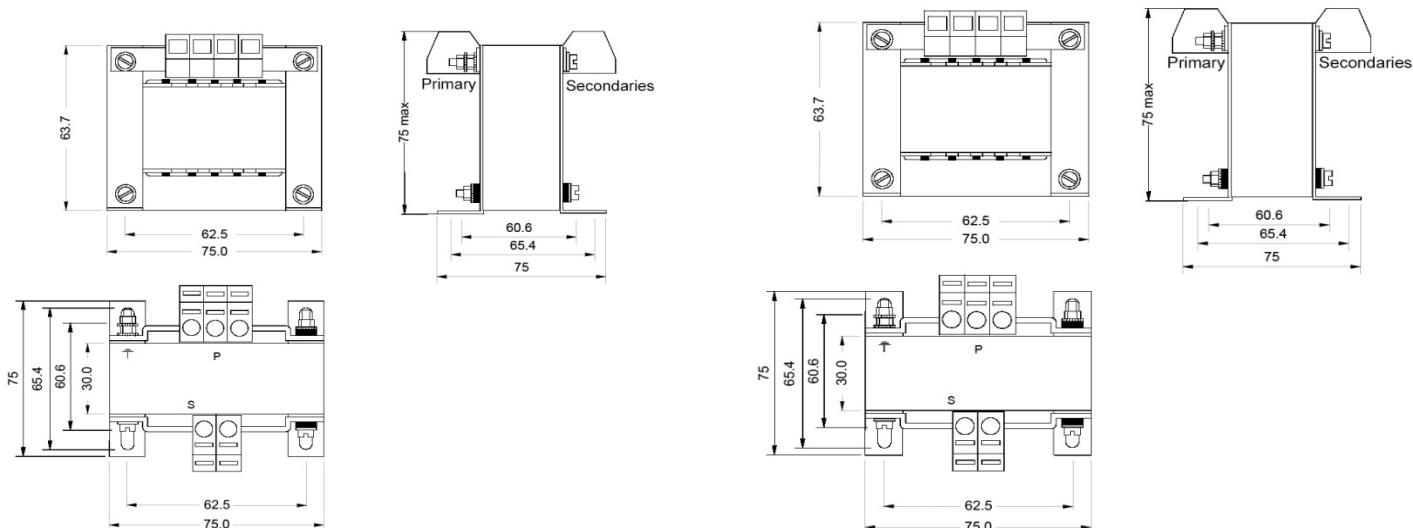

#### GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 1,2 kg

#### PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards