





DESCRIPTION : 63VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10063B1024	230V	24V	25,7V	2,625A	Ta40/B	63VA	EN61558-2-6
S10063B1048	230V	48V	51,5V	1,313A			EN61558-2-6
S10063B1115	230V	115V	124,0V	0,548A			EN61558-2-4
S10063B1230	230V	230V	248,0V	0,274A			EN61558-2-4
S10063B1400	230V	400V	435,5V	0,158A			EN61558-2-6
S10063B2024	230V	2x24V	2x25,7V	1,313A			EN61558-2-6
S10063B2048	230V	2x48V	2x51,4V	0,548A			EN61558-2-4
S10063B2115	230V	2x115V	2x123,8V	0,274A			EN61558-2-4
S10063A1024	400V	24V	25,5V	2,625A			EN61558-2-6
S10063A1048	400V	48V	50,9V	1,313A			EN61558-2-6
S10063A1115	400V	115V	123,3V	0,548A			EN61558-2-4
S10063A1230	400V	230V	247,1V	0,274A			EN61558-2-4
S10063A1400	400V	400V	428,0V	0,158A			EN61558-2-4
S10063A2024	400V	2x24V	2x25,1V	1,313A			EN61558-2-6
S10063A2048	400V	2x48V	2x50,2V	0,548A			EN61558-2-4
S10063A2115	400V	2x115V	2x120,6V	0,274A			EN61558-2-4

Electrical schematics



Mechanical schematics

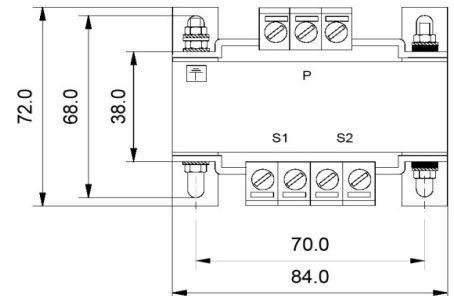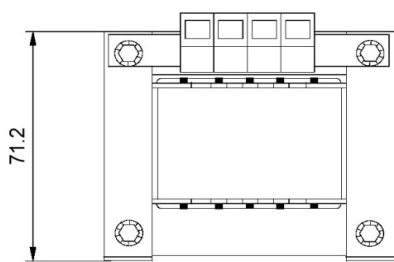

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 1,5 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

DATA SHEET

S10063 Series





DESCRIPTION : 63VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10063E1024	24V	26,2V	2,625A	Ta40/B	63VA	EN61558-2-6
S10063E1048	48V	52,3V	1,313A			EN61558-2-6
S10063E1115	115V	125,8V	0,548A			EN61558-2-4
S10063E1230	230V	251,4V	0,274A			EN61558-2-4
S10063E1400	400V	433,5V	0,158A			EN61558-2-4
S10063E2024	2x24V	2X26,2V	1,313A			EN61558-2-6
S10063E2048	2x48V	2x52,1V	0,548A			EN61558-2-6
S10063E2115	2x115V	2x125,1V	0,274A			EN61558-2-6

Electrical schematics



Mechanical schematics

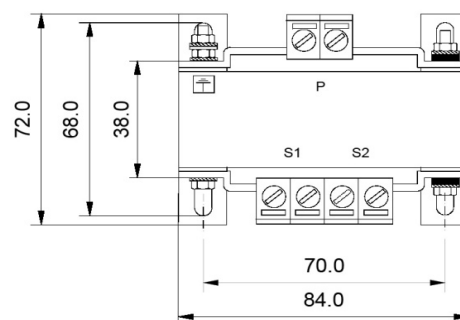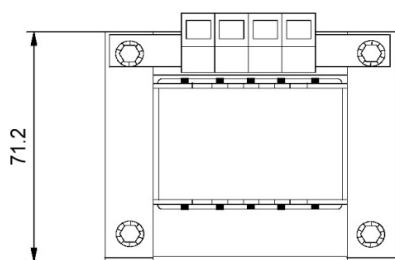

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 1,5 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards