

DATA SHEET

S10750 Series





DESCRIPTION : 750VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions




ELECTRICAL DATA

PN	Voltage		No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Primary	Secondary					
S10750B1024	230V	24V	24,8V	31,25A	Ta 40/B	750VA	EN61558-2-6
S10750B1048	230V	48V	49,5V	15,63A			EN61558-2-6
S10750B1115	230V	115V	119,5V	6,522A			EN61558-2-4
S10750B1230	230V	230V	239,0V	3,260A			EN61558-2-4
S10750B1400	230V	400V	415,0V	1,875A			EN61558-2-6
S10750B2024	230V	2x24V	2x24,8V	15,63A			EN61558-2-6
S10750B2048	230V	2x48V	2x49,5V	7,813A			EN61558-2-4
S10750B2115	230V	2x115V	2x119,5V	3,260A			EN61558-2-4
S10750A1024	400V	24V	24,8V	31,25A			EN61558-2-6
S10750A1048	400V	48V	49,5V	15,63A			EN61558-2-6
S10750A1115	400V	115V	119,5V	6,522A			EN61558-2-4
S10750A1230	400V	230V	239,0V	3,260A			EN61558-2-4
S10750A1400	400V	400V	415,0V	1,875A			EN61558-2-4
S10750A2024	400V	2x24V	2x24,8V	15,63A			EN61558-2-6
S10750A2048	400V	2x48V	2x49,5V	7,813A			EN61558-2-4
S10750A2115	400V	2x115V	2x119,5V	3,260A			EN61558-2-4

Electrical schematics



Mechanical schematics

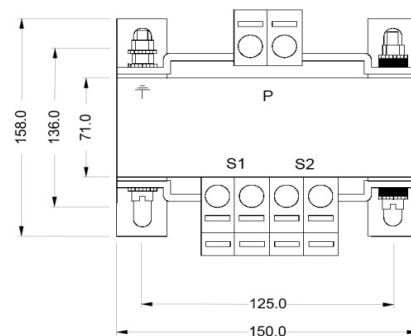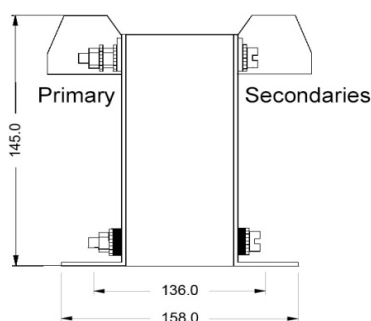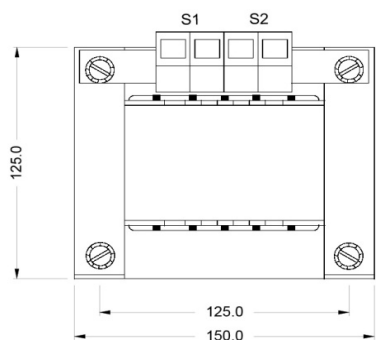

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 11,5 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards

DATA SHEET

S10750 Series





DESCRIPTION : 750VA Transformer Transformer with 2 Primary Tensions - 1 or 2 Secondary Tensions





ELECTRICAL DATA

PN	Voltage	No-load voltage	Secondary current	Ambiant T° T° class	Power	Standard
	Secondary					
S10750E1024	24V	24,7V	31,25A	Ta 40/B	750VA	EN61558-2-6
S10750E1048	48V	49,4 V	15,63A			EN61558-2-6
S10750E1115	115V	119,5V	6,522A			EN61558-2-4
S10750E1230	230V	238V	3,260A			EN61558-2-4
S10750E1400	400V	415V	1,875A			EN61558-2-4
S10750E2024	2x24V	2x24,7V	15,63A			EN61558-2-6
S10750E2048	2x48V	2x49,4 V	7,813A			EN61558-2-4
S10750E2115	2x115V	2x119,5V	3,260A			EN61558-2-4

Electrical schematics



Mechanical schematics

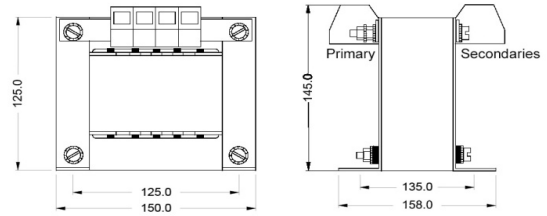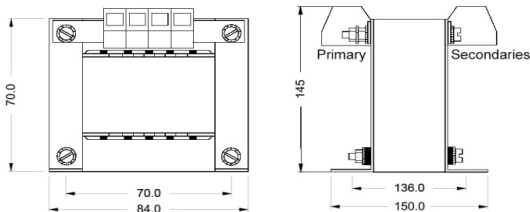

GENERAL CHARACTERISTICS

- Suitable for 50/60 Hz frequencies
- Insulation class: B
- Approximate weight : 11,5 kg

PRINTING

- TPE (TECH POWER ELECTRONICS)
- PN
- Date code
- Voltage
- Power
- Temperature class
- Standards