




## DESCRIPTION : 30A CURRENT SENSE TRANSFORMER

### MECHANICAL PROPERTIES

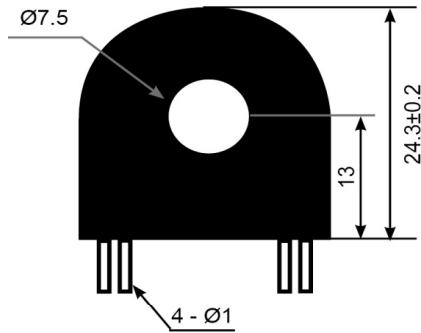

- Pins 1 & 2: secondary outputs
- Pins 3 & 4: blind pins
- Isolation Pri to Sec: 4,5 KVac min
- Weight: 14 g
- Unless otherwise stated, all dimensions in mm  $\pm 0,2$
- \*: same polarity

### ELECTRICAL PROPERTIES

CURRENT RANGE	0 ~ 30 A	FREQUENCY RANGE	50 ~ 400 Hz
TURN RATIO	1:1000	INTERNAL RESISTANCE	40Ω
PHASE ANGLE ERROR	≤15'	LINEARITY	≤0,3%
ACCURACY CLASS	0,5	RATED BURDEN RESISTANCE	≤50Ω
OPERATING TEMPERATURE RANGE	-40°C to +125°C		
STORAGE TEMPERATURE RANGE	-40°C to +125°C		